

ZMC


your safety our priority

High definition Mini CCD Camera

ZMC-3130CP1



DIMENSION

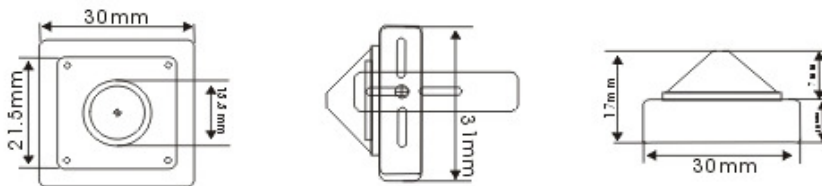

Model	ZMC-3130CP1
Image sensor	1/3" Sony Color CCD
Effective Pixels	NTSC : 512(H)X492(V) PAL : 500(H)X582(V)
H.Resolution	420 TV Lines
Synchronizing system	Internal
Scanning system	NTSC 525 Lines PAL 625 Lines 2:1 Interlaced
Video output	1.0Vp-p Composite. 75 Ohms
S/N ratio	More then 48 dB (AGC Off)
Min. Illumination	0.5Lux
White Balance	2100 x K...8200 x K Auto 4dB~30dB
Gain Contro	Automatic
Gamma correction	4dB~30dB Auto r=0.45
Smear Effect	0.005%
Shutter Speed	NTSC : 1/60...1/100,000 sec PAL : 1/50...1/100,000 sec
Operating current	125mA / regulated 12VC in
Power source	12VDC / 400mA
Lens	3.6mm,2.97mm,3.7mm
Operating Temperature	14 x F ... 122 x F (-10 x C ... +50 x C)
Humidity	Within 90% RH
Output Terminal	with BNC-Male for Video, DC Jack-Female
Measurement (mm)	30(D) x 30(L)
Weight (Approx.g)	50

ZMC Securities LLP

www.zmc.com.sg